


- ~~c.~~ 3. Gates serving three or more residences shall have a minimum horizontal width of 20 feet in the full open position, and
- ~~d.~~ 4. For all properties, gate height may not exceed the height of the monument, measured from grade, unless principal structure setbacks are met (if monuments are not proposed then gate height shall be regulated in accordance with the fence height regulations of section 78-1405(8), and
- ~~5. Gates must maintain an opacity level of no greater than 25 percent, and~~
- ~~e.~~ 6. For locked and/or secured gates a knock box, meeting the standards set forth by the police and fire department, must be provided for emergency access, and
- ~~f.~~ 7. On major thoroughfares the monuments and gates must be located 40 feet from the paved, traveled road to allow for vehicle stacking. A major thoroughfare for the purposes of this section means any county road or state highway.
- ~~i.~~ A building permit is required for installation and the property corners must be located for inspection purposes.

SECTION 2. EFFECTIVE DATE: This ordinance shall take effect immediately upon its passage and publication.

ADOPTED this 11th day of June, 2018 on a vote of 4 ayes and 0 nays by the City Council of Orono, Minnesota.

ATTEST:

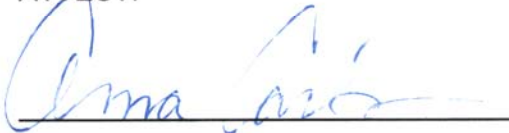

Anna Carlson, City Clerk



Dennis Walsh, Mayor

Ordinance published in *The Laker* and *The Pioneer* newspapers the week of June 23, 2018.